


NEW

# NBR HOSES




OIL

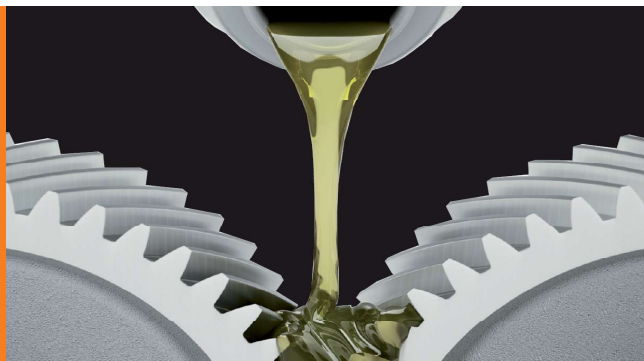

**Tubo multiuso sin refuerzo y sin presión de trabajo. Fabricado en NBR de dureza 70 shores.**

**Tub multiús sense reforç ni pressió de treball. Fabricada en NBR de duresa 70 sh.**

**Tubo multiuso senza rinforzo e senza pressione di lavoro. Realizzato in NBR in durezza 70 shore.**




Tubo multiuso sem reforço e sem pressão de trabalho. Feito de NBR em dureza 70 sh.

Mehrzweckschlauch ohne Verstärkung und ohne Arbeitsdruck. Hergestellt aus NBR in Härte 70 Shores

Tube polyvalent sans renforcement et sans pression de travail. Fabriqué en NBR en dureté 70 sh.

Multipurpose unreinforced hose without work pressure. Made of NBR in hardness 70 shores.



**Características:**

Alta resistencia a aceites, carburantes y disolventes. Buena resistencia a la abrasión, agentes atmosféricos y al ozono.

**Features:**

High resistance to oils, fuels and solvents. Good resistance to abrasion, atmospheric agents and ozone.

Datos técnicos

| Referencia<br>Referència<br>Référence<br>Riferimento<br>Best.-Nr. | Diámetros<br>Diàmetres<br>Diamètres<br>Diametri<br>Durchmesser |   | Grosor de pared<br>Gruix paret<br>Épaisseur de paroi<br>Spessore della parete<br>Wandstärke | Longitud rollo<br>Longitud rull<br>Longueur de bobine<br>Lunghezza<br>Spulenlänge | Peso aproximado<br>Pes aproximad<br>Peso approssimativo<br>Poids approximatif<br>Ungefähres Gewicht | MOQ<br>Quantitat mínima<br>Quantité minimum<br>Quantità minima<br>Mindestbestellmeng |
|---|--|---|---|---|---|--|
|   | Interior<br>Interior<br>Intérieur<br>Interni<br>Innen          | Exterior<br>Extèrior<br>Extérieur<br>Esterno<br>Außen |   |   |   |  |

|        | mm (")     | mm   | mm   | m     | Kg/m  | m   |   |
|--------|------------|------|------|-------|-------|-----|---|
| TNBR03 | 3 (1/8)    | 7    | 2    | 50-55 | 0,042 | 500 | △ |
| TNBR04 | 4,5 (3/16) | 9    | 2,25 | 50-55 | 0,064 | 500 | △ |
| TNBR05 | 5 (13/64)  | 10   | 2,5  | 50-55 | 0,080 | 500 | △ |
| TNBR06 | 6 (1/4)    | 10   | 2    | 50-55 | 0,068 | 500 | △ |
| TNBR07 | 7 (9/32)   | 12   | 2,5  | 50-55 | 0,097 | 300 | △ |
| TNBR08 | 8 (5/16)   | 12   | 2    | 50-55 | 0,085 | 300 | △ |
| TNBR09 | 9 (23/64)  | 14   | 2,5  | 50-55 | 0,116 | 300 | △ |
| TNBR10 | 10 (3/8)   | 15   | 2,5  | 50-55 | 0,127 | 300 | △ |
| TNBR12 | 12 (1/2)   | 15,5 | 1,75 | 50-55 | 0,102 | 300 | △ |
| TNBR15 | 15 (5/8)   | 20   | 2,5  | 50-55 | 0,185 | 200 | △ |
| TNBR20 | 20 (25/32) | 25,5 | 2,75 | 50-55 | 0,266 | 150 | △ |

